




Specificatinos 規格

Model	型號	ANEX-40 II W			
Capacity (kN)	加壓能力 (kN)	400			
Stroke length (mm)	行程 (mm)	20	25	32	40
Maximum SPM (SPM)	最高轉速 (SPM)	850		800	700
Minimum SPM (SPM)	最低轉速 (SPM)	180			
Capacity limitation (mm)	能力發生點 (mm)	2			
Die height (mm)	閉模高度 (mm)	240			235
Die height adjustment (mm)	閉模高度調節量 (mm)	50			45
Slide area (mm)	滑塊尺寸 (mm)	950 × 450			
Bolster area (mm)	工作台尺寸 (mm)	950 × 600			
Bolster thickness (mm)	工作台厚度 (mm)	120			
Bed opening (mm)	床台下料孔 (mm)	790 × 120			
Bolster opening (mm)	工作台下料孔 (mm)	700 × 100			
Main motor (kW)	主馬達 (kW)	18.5			
Feeder model	送料機型號	GX-80B			
Feed level (mm)	送料綫高度 (mm)	120 ± 20			
Feed direction	送進方向	Left → Right			
Stock thickness (mm)	材料厚度 (mm)	MAX 2.0			
Stock width (mm)	材料寬度 (mm)	8 ~ 80			
Feed length (mm)	送進長度 (mm)	0 ~ 80			
JIS accuracy	JIS 精度	特級 Special			
Upper weight (kg)	上模重量 (kg)	150 以下 / 150 ~ 180			
Gross weight (kg)	總重量 (kg)	9500			

General View 外觀圖

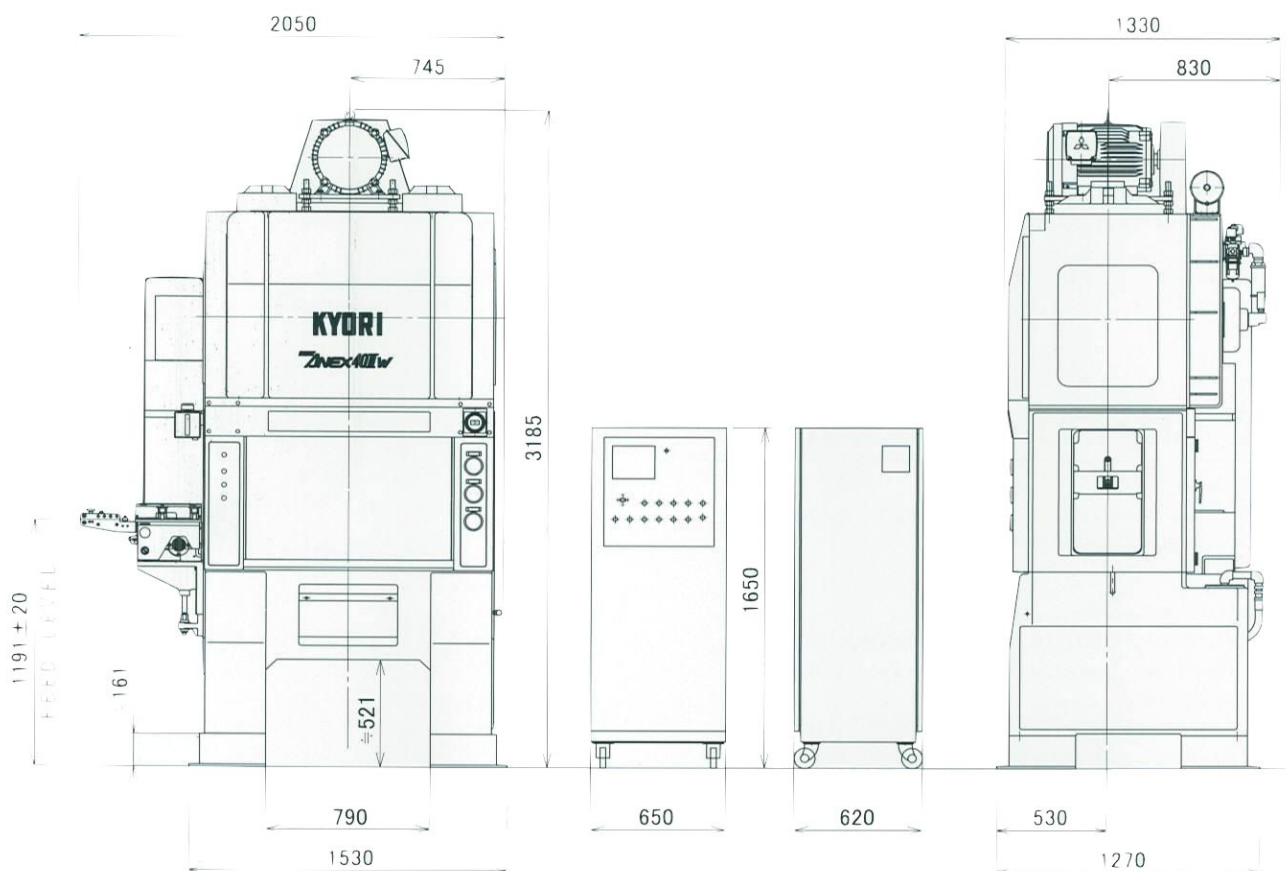

(mm)